



# APMFG Fabricators Inc.

PN# A-32W new Area Flood or CCTV LED low voltage designed lighting fixture.

Features:

Universal mounting Round Pole, Square Pole or Wall Mount.

Beam direction: up, down and can be adjusted to desired beam angle direction.

Long lasting durable powder coat finish.

MIL SPEC-DTL-53039-C-COLOR TAN IN-FARED available

Input Voltage 12 VDC - 24VDC also configured for 110VAC-240VAC

32.2 Watt Bright White LED light design for optimal lighting illumination.

All heavy duty Aluminum Fixture housing and heat sink for best heat dissipation.

Custom aluminum 1/4" thick machined led bezel held in with Stainless Steel tamper proof machined screws.

LED's are configured for optimum output and degree's off ight.

Clear 1/4" thick Lexan lens durable and shock resistant.



The PN# A-32 can be mounted in various positions vertical and horizontal with 110 degree adjustment positive or negative, and mounts to 3" , 4" round or square poles

Fixture foot print 11" x 7" x 3" Formed Heavy Aluminum with bracket.

Illumination matrix is based on 5000K bight white LED's 32 watt DC load for Solar Application or 110 AC

Mounting heights 10ft high to 15ft high

Beam Lighting distance and width:

60 foot X 40ft.

Photo Matrix readings: in following pages

PN#	LAMP TYPE	WATTS	INPUT VOLTS	FORWARD CURENT	LED COLOR	FLUX
N-A-32W	Pole Mount	33	13.6 DC	1000MA 350MA	BRIGHT WHITE	5000K
N-A-32W	Pole Mount	33	24 DC	1000MA 350MA	BRIGHT WHITE	5000K
N-A-32W	Surface Mount	33	110 VAC	1000MA 350MA	BRIGHT WHITE	5000K
	AVAILABLE	60+ W				

HIGH OUTPUT BRIGHT WHITE 5000K SERIES LED'S

LUMEN OUTPUT 3540

5 YEAR WARRANTY ON LED'S

3 YEAR WARRANTY ON DRIVERS

50000 HOURS OF ILLUMINATION

UL APPROVED COMPONENTS

**DO NOT COPY PROPRIETARY DESIGN**


APMFG Fabricators Inc. - Solar LED Lighting Fixtures

614 Airport Road, Oceanside, CA 92058

760-967-8464 [ovargas@apmfg.net](mailto:ovargas@apmfg.net) [www.apmfgsolar.com](http://www.apmfgsolar.com) [www.apmfg.net](http://www.apmfg.net)



APMFG Fabricators Inc.

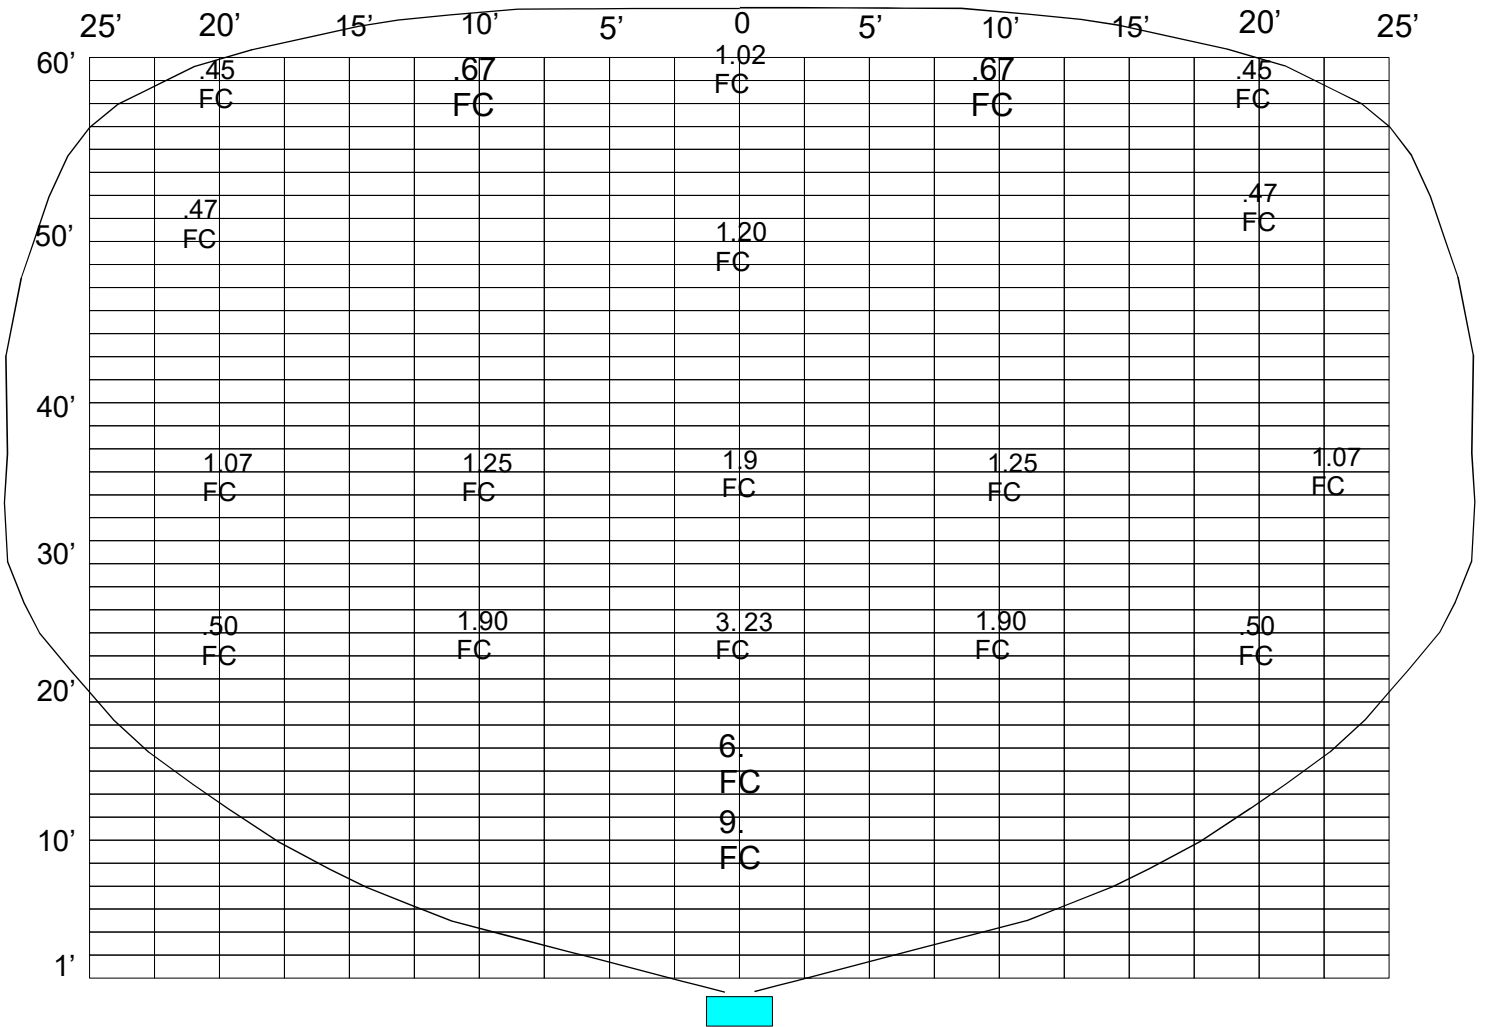


FIXTURE HEIGHT 10FT  
ILLUMINATION DISTANCE 50FT & WIDTH 40 FT

MEASUREMENT  
IN FOOT CANDLES

APMFG Fabricators Inc. - Solar LED Lighting Fixtures  
614 Airport Road, Oceanside, CA 92058  
760-967-8464 [ovargas@apmfg.net](mailto:ovargas@apmfg.net) [www.apmfgsolar.com](http://www.apmfgsolar.com) [www.apmfg.net](http://www.apmfg.net)



APMFG Fabricators Inc.

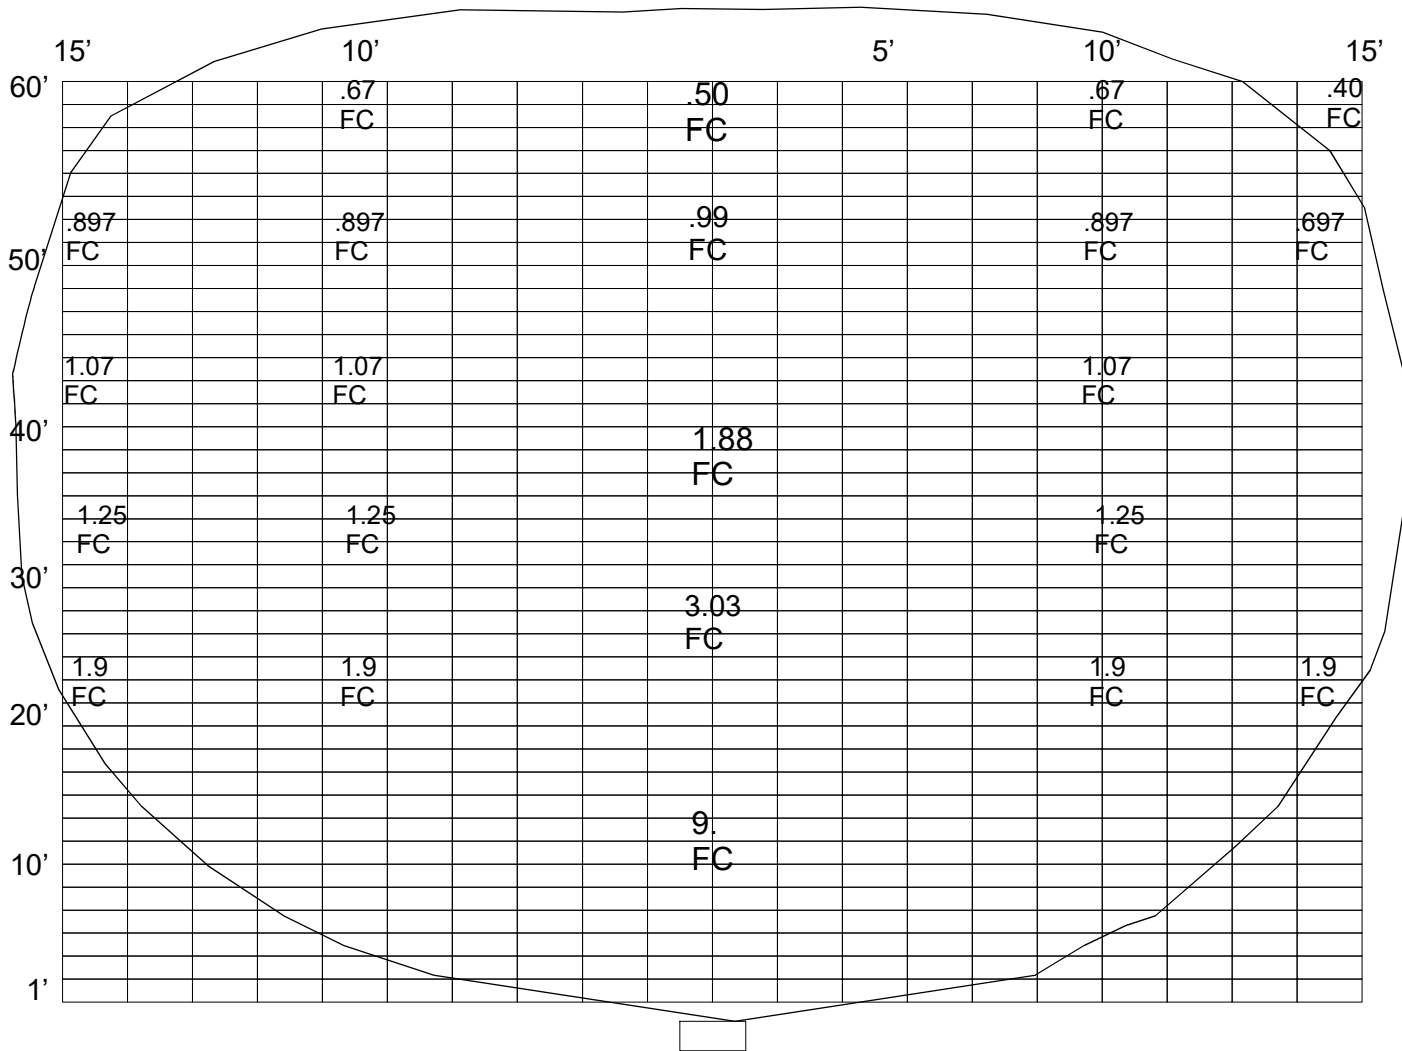

FIXTURE HEIGHT 15FT  
ILLUMINATION DISTANCE 60FT & WIDTH 40 FT

MEASUREMENT  
IN FOOT CANDLES

APMFG Fabricators Inc. - Solar LED Lighting Fixtures  
614 Airport Road, Oceanside, CA 92058  
760-967-8464 [ovargas@apmfg.net](mailto:ovargas@apmfg.net) [www.apmfgsolar.com](http://www.apmfgsolar.com) [www.apmfg.net](http://www.apmfg.net)